MSP 216D


Compact 4K Signal Distributor



Key Features

- Support HDMI 1.3 or DVI 1.0 protocol
- Max resolution supported: 3840×2160
- Enhanced connectivity with gold plated DVI connector
- HDMI or DVI can be selected via EDID DIP switch
- Automatic identification for input format
- Universal 12V power cable for MSP series
- Signal indicator real-time display
- Automatic adjustment for DVI output gain
- EDID management via USB connection to xSet
- Up to 3 MSP 216 devices can be cascaded

Dimensions

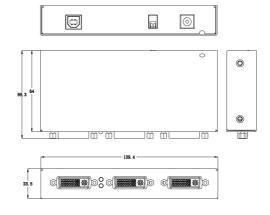


Specification

		1 0\//		
Connectors	Input	1 × DVI		
	Output	2 × DVI		
	Power	5.4mm DC Socket		
Performance Power	Input Resolution	DVI:	SMPTE: 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 VESA: 640×480@60 800×600@60 1024×768@60 1280×702@60 1280×800@60 1280×960@60 1280×1024@60 1366×768@60 1440×900@60 1400×1050@60 1600×1200@60 1680×1050@60 1920×1200@60 1920×1200@60 2048×1152@60 2560×816@60 3840×12160@30	
	Output Resolution	DVI:	SMPTE: 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 VESA: 640×480@60 800×600@60 1024×768@60 1280×720@60 1280×800@60 1280×960@60 1280×1024@60 1366×768@60 1440×900@60 1400×1050@60 1600×1200@60 1680×1050@60 1920×1080@60 1920×1200@60 2048×1152@60 2560×816@60 3840×1080@60 3840×2160@30	
	Supported Standards	DVI:	1.0	
	Input Voltage	12V DC (via universal Plug Pack)		
	Max Power	1.5A		
Environment	Temperature	0°C~45°C		
	Humidity	10%~85	10%~85%	
Physical	Weight	0.17kg (Net Weight) 0.5kg (Package Weight)		
	Dimensions	139.4mm × 64mm × 23.7mm (Device Dimension)		
		170mm × 120mm × 80mm (Package Dimension)		

Order Codes

Product Code	Item
620-0216-11-0	MSP 216 - 1 DVI in / 2 DVI Out Distributor

Application

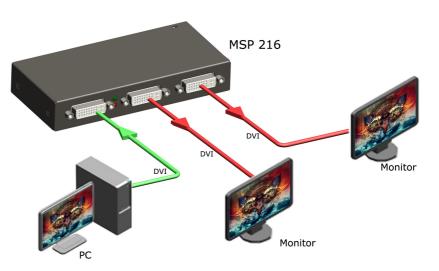

Tel: +86-592-5771197 Fax: +86-592-5788216 E-mail: sales@rgblink.com www.rgblink.com Headquarter: S601, Weiye Building Torch Hi-Tech

Industrial Development Zone, Xiamen, Fujian Province, P.R.C

