

MSP 314-2




Key Features

- Compatible with VESA resolutions up to WUXGA (1920x1600) 60Hz
- Transmit 500m by 50/125um or 62.5/125um Multi Mode Fiber to extend DVI signal
- Transmit 2000m by Single Mode Fiber to extend DVI signal
- Built-in WDM wave plate , 1310nm/1550nm laser diode as optical source
- Compact shell structure


Specification

Connectors	Input	Transmitter	1xDVI
		Receiver	2xLC
	Output	Transmitter	2xLC
		Receiver	1xDVI
Performance	Input Resolution	DVI SMPTE	480i@60 576i@60 720p@50/60 1080p@50/60
		VESA	800x600@60 1024x768@60 1280x768@60 1280x1024@60 1360x768@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2560x816@60
	Output Resolution	DVI SMPTE	480i@60 576i@60 720p@50/60 1080p@50/60
		VESA	800x600@60 1024x768@60 1280x768@60 1280x1024@60 1360x768@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2560x816@60
	Supported Standard	DVI	S-DVI
Extend Distance		300m (Multi Mode Fiber)	2000m (Single Mode Fiber)
Power	Input Voltage	5V DC	
Physical	Weight	0.16kg	
	Dimension	70mmx39mmx15mm	

Application

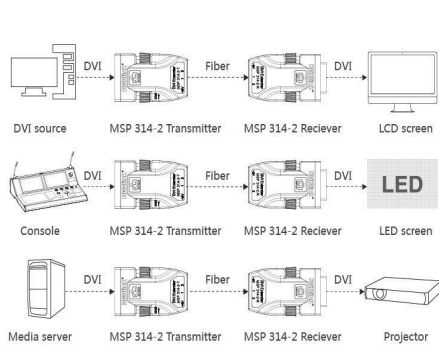

Dimension

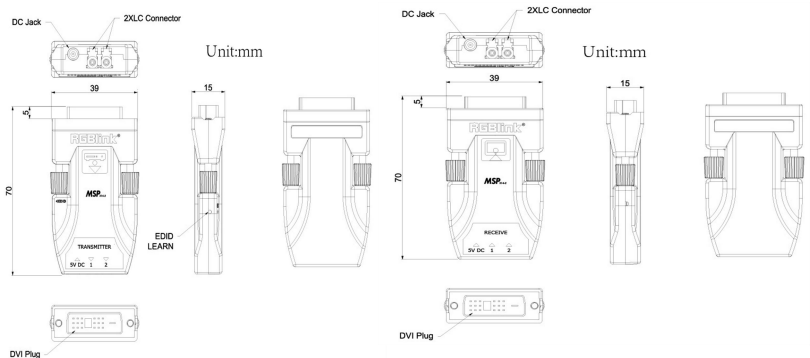

MSP 314-2 Transmitter

MSP 314-2 Receiver

Order Codes

Product Code	Item
611-0001-01-0	MSP 314-2

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
 Headquarter: S601 Weiyue Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.



www.rgbink.com



Specifications are correct at time of printing and subject to change or alteration without notice.