

MSP 217



Key Features

- Miniature size
- Transmission distance up to 10km by single mode fiber
- Auto adjusted 3Gbps/10Gbps SPF module
- Stable transmission
- Embedded audio pass through
- Auto detect input format


Specification

Connectors	Input	1xSDI 1xOptical Fiber	
	Output	1xSDI 1xOptical Fiber	
Performance	Input Resolutions	SMPTE 480i 576i 720p@23.97/24/25/29.97/30/50/59.94/60 1080i@50/59.94/60 1080p@23.97/24/25/29.97/30/50/59.94/60	
	Output Resolutions	SMPTE 480i 576i 720p@23.97/24/25/29.97/30/50/59.94/60 1080i@50/59.94/60 1080p@23.97/24/25/29.97/30/50/59.94/60	
	Fiber	Single Mode	Multi-mode
	Wave Length	1310nm	1270nm
	Transmission Rate	10Gpbs	10Gpbs
	Transmission Distance	10km	300m
	Transmission Type	Single Mode Twin Core	Multi-mode twin core
	Hot Plug	Yes	Yes
Power	Supported Standard	SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI	
	Input Voltage	DC 12V, 1.5A	
Enviroment	Temperature	0~45℃	
	Humidity	10%~85%	
Physical	Weight	Nett	0.18 kg
		Packaged	0.7 kg
	Dimensions	Nett	115x93x24mm
		Packaged	170x120x80mm

Application



Dimensions

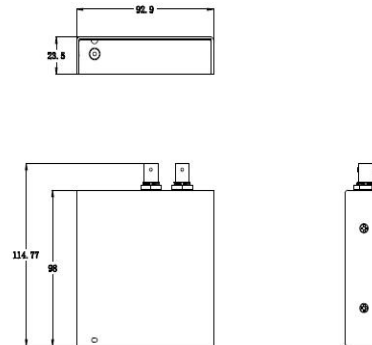

Order Codes

Product Code	Item
610-0217-01-0	MSP 217

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]

www.rgblink.com

