


X1PRO-E




Key Features

- Dual Link DVI/HDMI1.4/DisplayPort1.1 input compatible
- Creat videowall up to 4K2K /8K1K
- Up to 4 pictures display on each output
- Independent PST to PGM Switching
- 3 optional input modules
- Scale and Seamless Switching of 2K and 4K inputs
- Multiple operation modes
- 4K EDID management
- XPOSE control compatible
- Support mulitple cascade control

Application

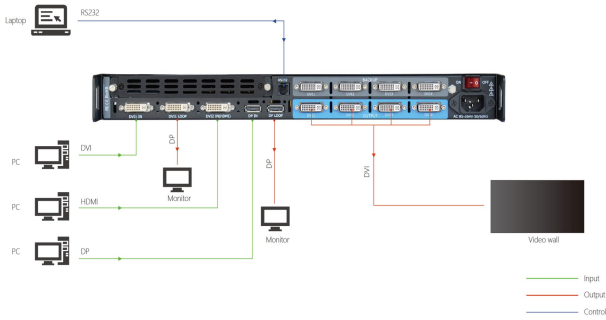

Dimensions

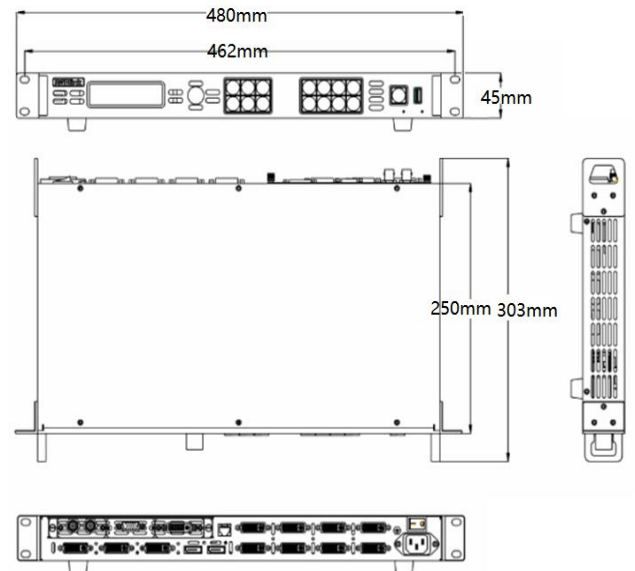

Order Codes

Product Code	Item
110-0001-21-0	X1PRO-E
190-0001-03-1	Single 2K DP Module
190-0001-04-1	Single DVI Input
190-0001-06-1	Single HDMI Input/Loop Module
190-0001-07-1	Single 3G SDI Input/Loop Moudle
190-0001-09-1	Single CVBS Input/Backup Module
190-0001-10-1	Single USB Input/Backup Module
190-0001-02-1	Single VGA Input Module
980-0001-01-1	Input EXT interface

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiyi Building,Torch Hi-Tech Development Zone,Xiamen,Fujian,P.R.C.



www.rgblink.com



Specifications are correct at time of printing and subject tochange or alteration without notice.

Specification

Connectors	Input	<i>Standard with</i> DVI 1 In/Loop 2 × DVI-I DVI 2 In 1 × DVI-I (HDMI 1.4 Compatible) DP In/Loop 2 × DisplayPort <i>1 slot up to 3 single inputs, select from below</i> DVI Module 1 × DVI-I HDMI Module 2 × HDMI (1 In/1 Loop) 3G SDI Module 2 × BNC (1 In/1 Loop) DP Module 1 × DisplayPort VGA Module 1 × DB15 CVBS Module 2 × BNC (1 In/1 Backup) USB 2.0 Module 2 × USB-A(1 In/1 Backup)
	Output	<i>Standard with</i> DVI 8 × DVI-I (4 Out/4 Backup)
	Communication	RS232 1 × RJ11 USB 1 × USB-A
	Power	1 × IEC
Performance	Input Resolutions	DVI HDMI DP SMPTE 480i 576i 720p@50/59.94/60Hz 1080i@50/59.94/60Hz 1080p@50/59.94/60 VESA 800×600@60 1024×768@60 1280×768@60 1280×1024@60 1366×768@60 1600×1200@60 1920×1080@60 3840×2160@30 CVBS SMPTE 480i 576i SDI SMPTE 480i 576i 720p@25/30/50/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 VGA VESA 800×600@60 1024×768@60 1280×1024@60 1366×768@60 1440×900@60 1600×1200@60
	Output Resolutions	<i>Select from below or configure customized</i> DVI SMPTE 720p@50/59.94/60 1080p@50/59.94/60 VESA 800×600@60 1024×768@60/75/85 1280×720@50/60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1400×1050@60 1440×900@60 1600×1200@60 1680×1050@60 1920×1080@60 1920×1200@60 2048×1152@60 2560×816@60
	Supported Standard	SDI SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI HDMI 1.4 DVI Dual DVI VGA VGA-UXGA DisplayPort 1.1a
Power	Input Voltage	AC 100V-240V, 50/60Hz
	Max Power	65W
Environment	Temperature	0°C ~ 55°C
	Humidity	20%~90%
Physical	Weight	Nett 2.7kg
		Packaged 6.3kg
	Dimension	Nett 480mmx303mmx45mm
		Packaged 535mmx355mmx130mm

